


| Color | Type | Technology | Case |
|-------|---------------|------------|-------------------------------------|
| Blue | B-470-570BD/C | InGaN | 5 mm plastic lens, blue diffused |

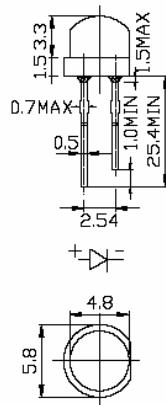

Maximum Ratings at $T_a = 25^\circ\text{C}$

| Parameter | Test conditions | Symbol | Value | Unit |
|-------------------------|------------------------------------|-----------|------------|------------------|
| Forward current | | I_F | 25 | mA |
| Peak forward current | Duty 1/10, $f \leq 10 \text{ kHz}$ | I_{FP} | 100 | mA |
| Power dissipation | | P_D | 100 | mW |
| Reverse voltage | $I_R = 10 \mu\text{A}$ | V_R | 5 | V |
| Reverse current | $U_R = 5 \text{ V}$ | I_R | 10 | μA |
| Electrostatic discharge | Human body model | ESD | 150 | V |
| Operating temperature | | T_{opr} | -20 to +75 | $^\circ\text{C}$ |
| Storage temperature | | T_{stg} | -30 to +80 | $^\circ\text{C}$ |
| Soldering temperature | 5 sec max, 3 mm from body | T_{sol} | 260 | $^\circ\text{C}$ |

Optical and Electrical Characteristics at $T_a = 25^\circ\text{C}$

| Parameter | Test conditions | Symbol | Min. | Typ. | Max. | Unit |
|---------------------|-----------------------|-----------------|------|------|------|------|
| Forward voltage | $I_F = 20 \text{ mA}$ | V_F | 2.8 | 3.4 | 4.0 | V |
| Luminous intensity | $I_F = 20 \text{ mA}$ | I_V | | 440 | | mcd |
| Luminous flux | $I_F = 20 \text{ mA}$ | Φ_V | | 700 | | mlm |
| Radiant power | $I_F = 20 \text{ mA}$ | Φ_e | | 16.6 | | mW |
| Peak wavelength | $I_F = 20 \text{ mA}$ | λ_p | | 470 | | nm |
| Dominant wavelength | $I_F = 20 \text{ mA}$ | λ_d | | 470 | | nm |
| Spectral halfwidth | $I_F = 20 \text{ mA}$ | $\Delta\lambda$ | | 30 | | nm |
| Viewing angle | $I_F = 20 \text{ mA}$ | φ | | 70 | | deg. |