


# LED lamp

W-556WD

Color	Type	Technology	Case
White	W-556WD	InGaN/GaN	5 mm plastic lens, white diffused

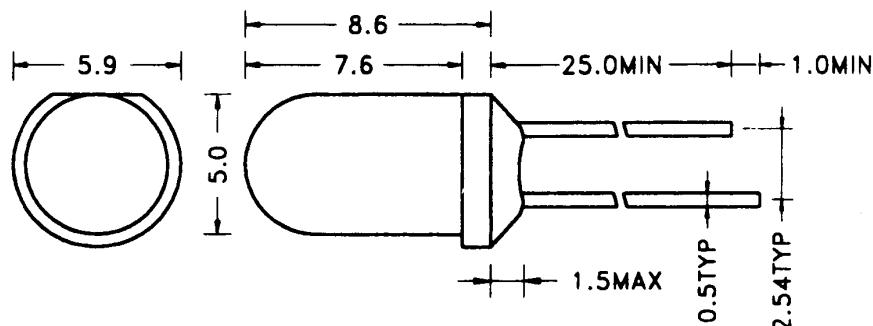

## Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Test conditions	Symbol	Value	Unit
Forward current		$I_F$	30	mA
Peak forward current	Duty 1/10, $f \leq 10$ kHz	$I_{FP}$	100	mA
Power dissipation		$P_D$	120	mW
Reverse voltage	$I_R=10 \mu\text{A}$	$V_R$	5	V
Reverse current	$U_R=5 \text{ V}$	$I_R$	50	$\mu\text{A}$
Electrostatic discharge	Human body model	ESD	150	V
Operating temperature		$T_{opr}$	-20 to +80	$^\circ\text{C}$
Storage temperature		$T_{stg}$	-30 to +100	$^\circ\text{C}$
Soldering temperature	5 sec max, 2 mm from body	$T_{sol}$	260	$^\circ\text{C}$

## Electrical and Optical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Test conditions	Symbol	Min.	Typ.	Max.	Unit
Forward voltage	$I_F = 20 \text{ mA}$	$V_F$		3.3	4.0	V
Luminous intensity	$I_F = 20 \text{ mA}$	$I_V$	1500	2500		mcd
Luminous flux	$I_F = 20 \text{ mA}$	$\Phi_V$		2100		mlm
Radiant power	$I_F = 20 \text{ mA}$	$\Phi_e$		8.8		mW
Viewing angle	$I_F = 20 \text{ mA}$	$\varphi$		56		deg.

rev.01/07