


Color	Type	Technology	Case
Warm white	WW-550	InGaN	5 mm plastic lens, water clear

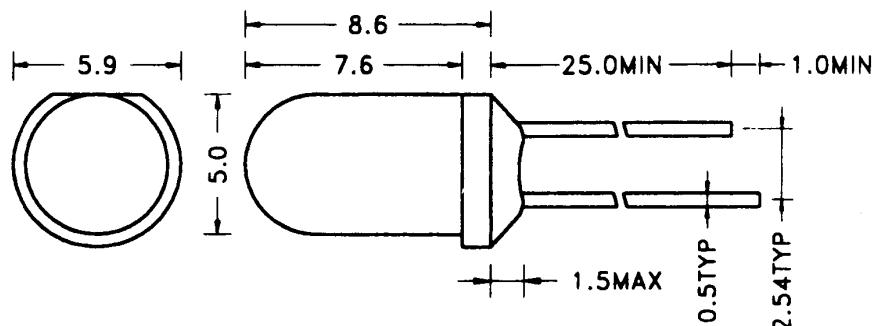

#### Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Test conditions	Symbol	Value	Unit
Forward current		$I_F$	25	mA
Peak forward current	Duty 1/10, $f \leq 10$ kHz	$I_{FP}$	100	mA
Power dissipation		$P_D$	100	mW
Reverse voltage	$I_R = 10 \mu\text{A}$	$V_R$	5	V
Reverse current	$U_R = 5 \text{ V}$	$I_R$	10	$\mu\text{A}$
Electrostatic discharge	Human body model	ESD	150	V
Operating temperature		$T_{opr}$	-20 to +75	$^\circ\text{C}$
Storage temperature		$T_{stg}$	-30 to +80	$^\circ\text{C}$
Soldering temperature	5 sec max, 3 mm from body	$T_{sol}$	260	$^\circ\text{C}$

#### Electrical and Optical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Test conditions	Symbol	Min.	Typ.	Max.	Unit
Forward voltage	$I_F = 20 \text{ mA}$	$V_F$	2.8	3.3	4.0	V
Color temperature	$I_F = 20 \text{ mA}$	CCT		3200		K
Chromaticity coordinates	$I_F = 20 \text{ mA}$	X		0.43		
	$I_F = 20 \text{ mA}$	Y		0.41		
Luminous intensity	$I_F = 20 \text{ mA}$	$I_V$	4900	6000	6900	mcd
Luminous flux	$I_F = 20 \text{ mA}$	$\Phi_V$		3500		mlm
Radiant power	$I_F = 20 \text{ mA}$	$\Phi_e$		13.7		mW
Viewing angle	$I_F = 20 \text{ mA}$	$\phi$		50		deg.